

Mobile network hacking – All-over-IP edition
BlackHat EU, Dec 4 2019, London

Luca Melette <luca@srlabs.de>
Sina Yazdanmehr <sina@srlabs.de>



Security
Research
Labs

THE VERGE GOOGLE

GOOGLE IS FINALLY TAKING CHARGE OF THE RCS ROLLOUT

Google will provide RCS Chat directly to any Android user... eventually

By Dieter Bohn | @backlon | Jun 17, 2019, 3:00pm EDT

Research question

After several decades of intercept attacks (A5/1, SS7, IMSI catchers), **will RCS finally protect text messages?**

AT&T, Verizon, Sprint, and T-Mobile have finally agreed to replace SMS with a new RCS standard

There will be a new app

By Dieter Bohn | @backlon | Oct 24, 2019, 7:19pm EDT

1. Mobile attack recap


2. Attacks on new technologies

3. Mitigations

Known mobile network attacks can be categorized into 5 classes

Attack impact	Attack scope	Attack details
I Intercept calls and texts	Local	<ul style="list-style-type: none">Passively sniff and crack weak encryption (A5/1, A5/2), run IMSI catcherReroute voice flows enabling call forwarding via SS7
	Remote	
II Impersonate user identity	Local	<ul style="list-style-type: none">Grab TMSIs over-the-air, spoof originating call or SMS via radio interfaceSend SMS or USSD code on behalf of another user via SS7
	Remote	
III Track users	Local	<ul style="list-style-type: none">Collect IMSIs from the radio interface, verify user presence with silent SMSGlobally locate mobile subscribers by requesting serving tower via SS7
	Remote	
IV Conduct fraud	No charge	<ul style="list-style-type: none">Disable call barrings and prepaid data limits via SS7Spoof calls and SMS to premium numbers, steal bank OTP codes in SMS
	Charge others	
V DoS users or network	Subscriber	<ul style="list-style-type: none">Make users unreachable via detach message (radio) or cancel location (SS7)Exhaust MSC/HLR resources via SS7 requests (RESET, PRN, ATI, PSI)
	Network	

Only some parts of a telco networks have been publicly dissected by security researchers

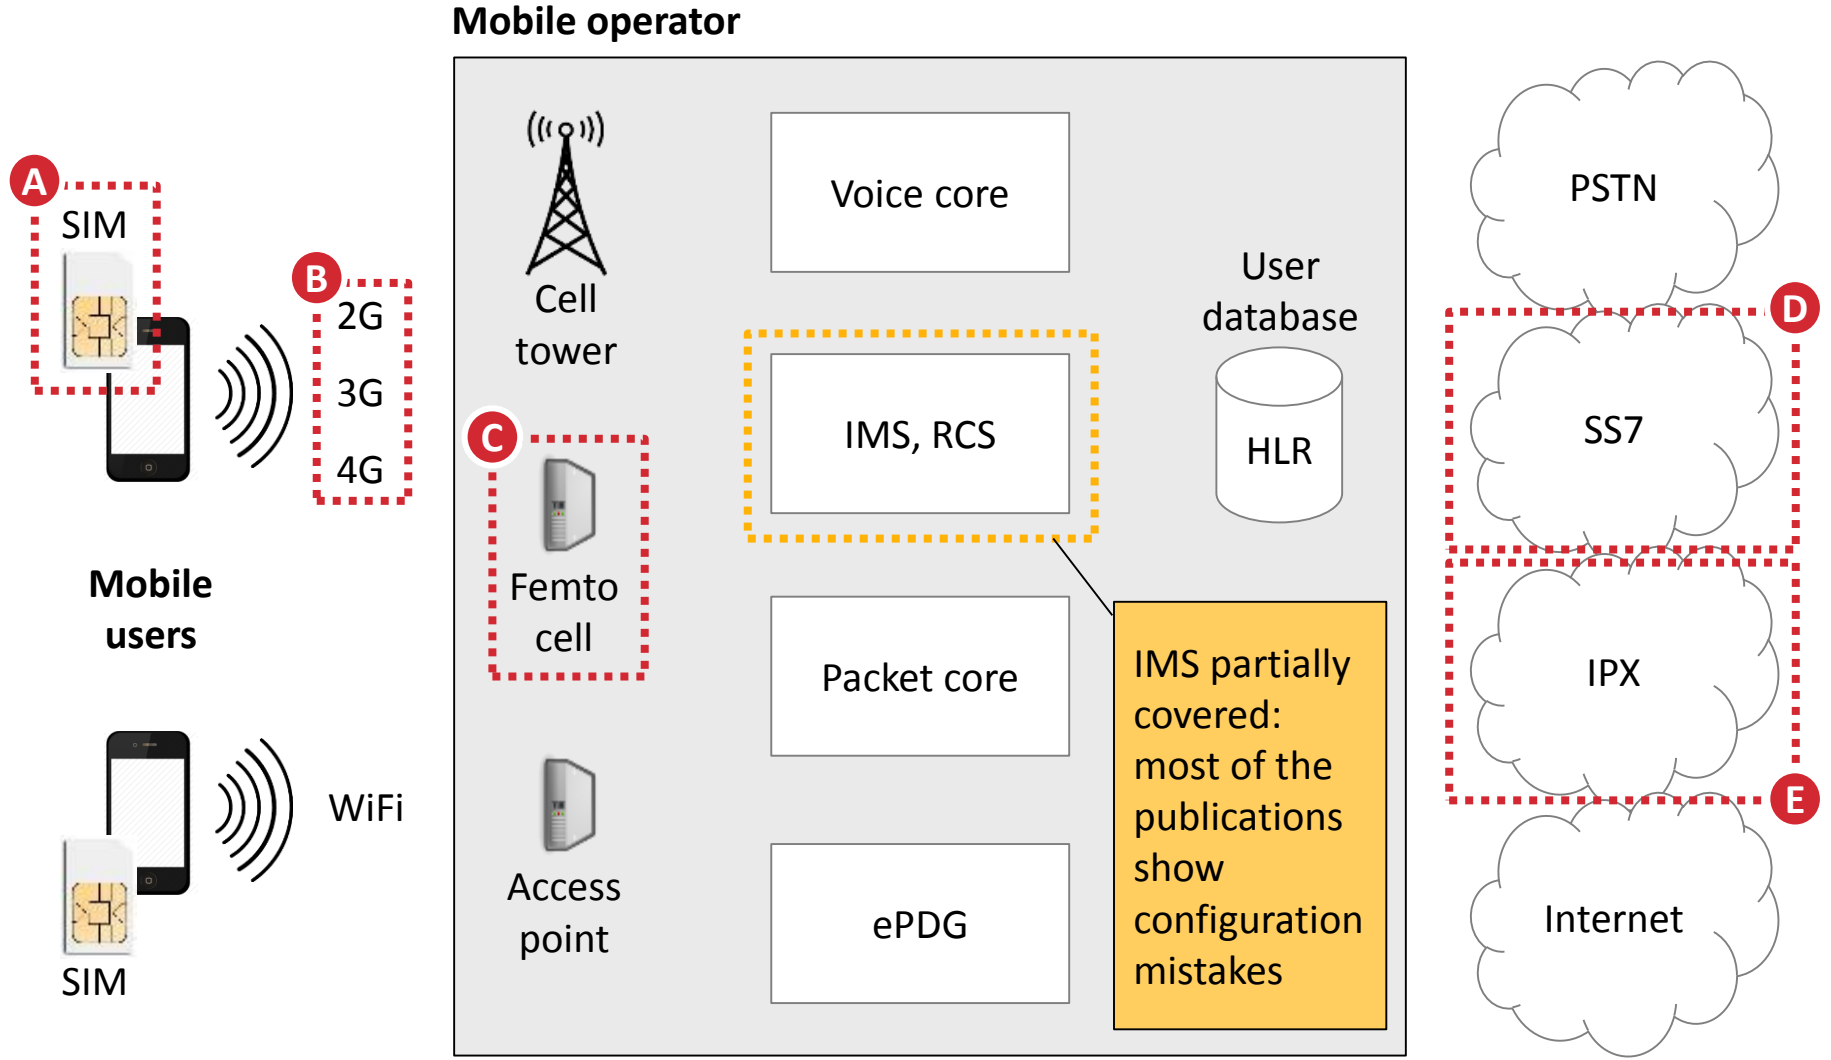


- Several vulnerabilities have been identified in these telco components:
- A. Malicious applications can be remotely installed in SIM cards
 - B. Weak radio encryption allow call/SMS and data to be intercepted
 - C. Devices in user hands can provide privileged access to core nodes
 - D. Hackers can remotely intercept calls/SMS and track users because of missing authentication
 - E. Like point D, but for data connections

Legacy standards are being replaced by new technologies: IMS (VoLTE, VoWiFi) and RCS


Voice calls are moving from dedicated channels to voice-over-IP (VoIP)

Dedicated voice channels (CSFB)

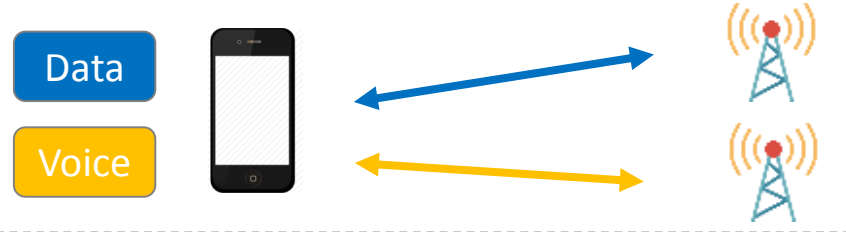

4G/5G The mobile uses legacy networks to transmit voice, the fast 4G link is only used for internet traffic
3G

Basic VoIP (IMS)

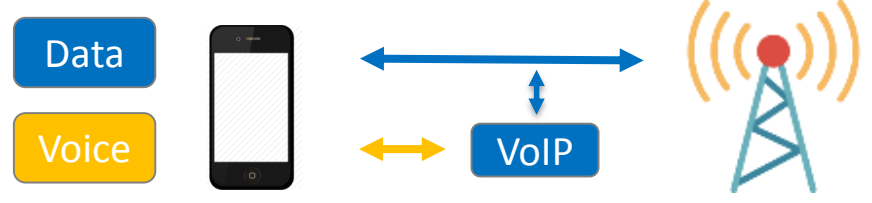

4G/5G IMS makes the fast LTE interface usable for both internet and voice traffic

Advanced VoIP (IMS+RCS)

RCS messaging is similar to WhatsApp, iMessage


RCS
Rich Communication Services

RCS is supported by an increasing number of networks

55 Operators


11 OEMs

RCS is already implemented by at least 100 mobile operators

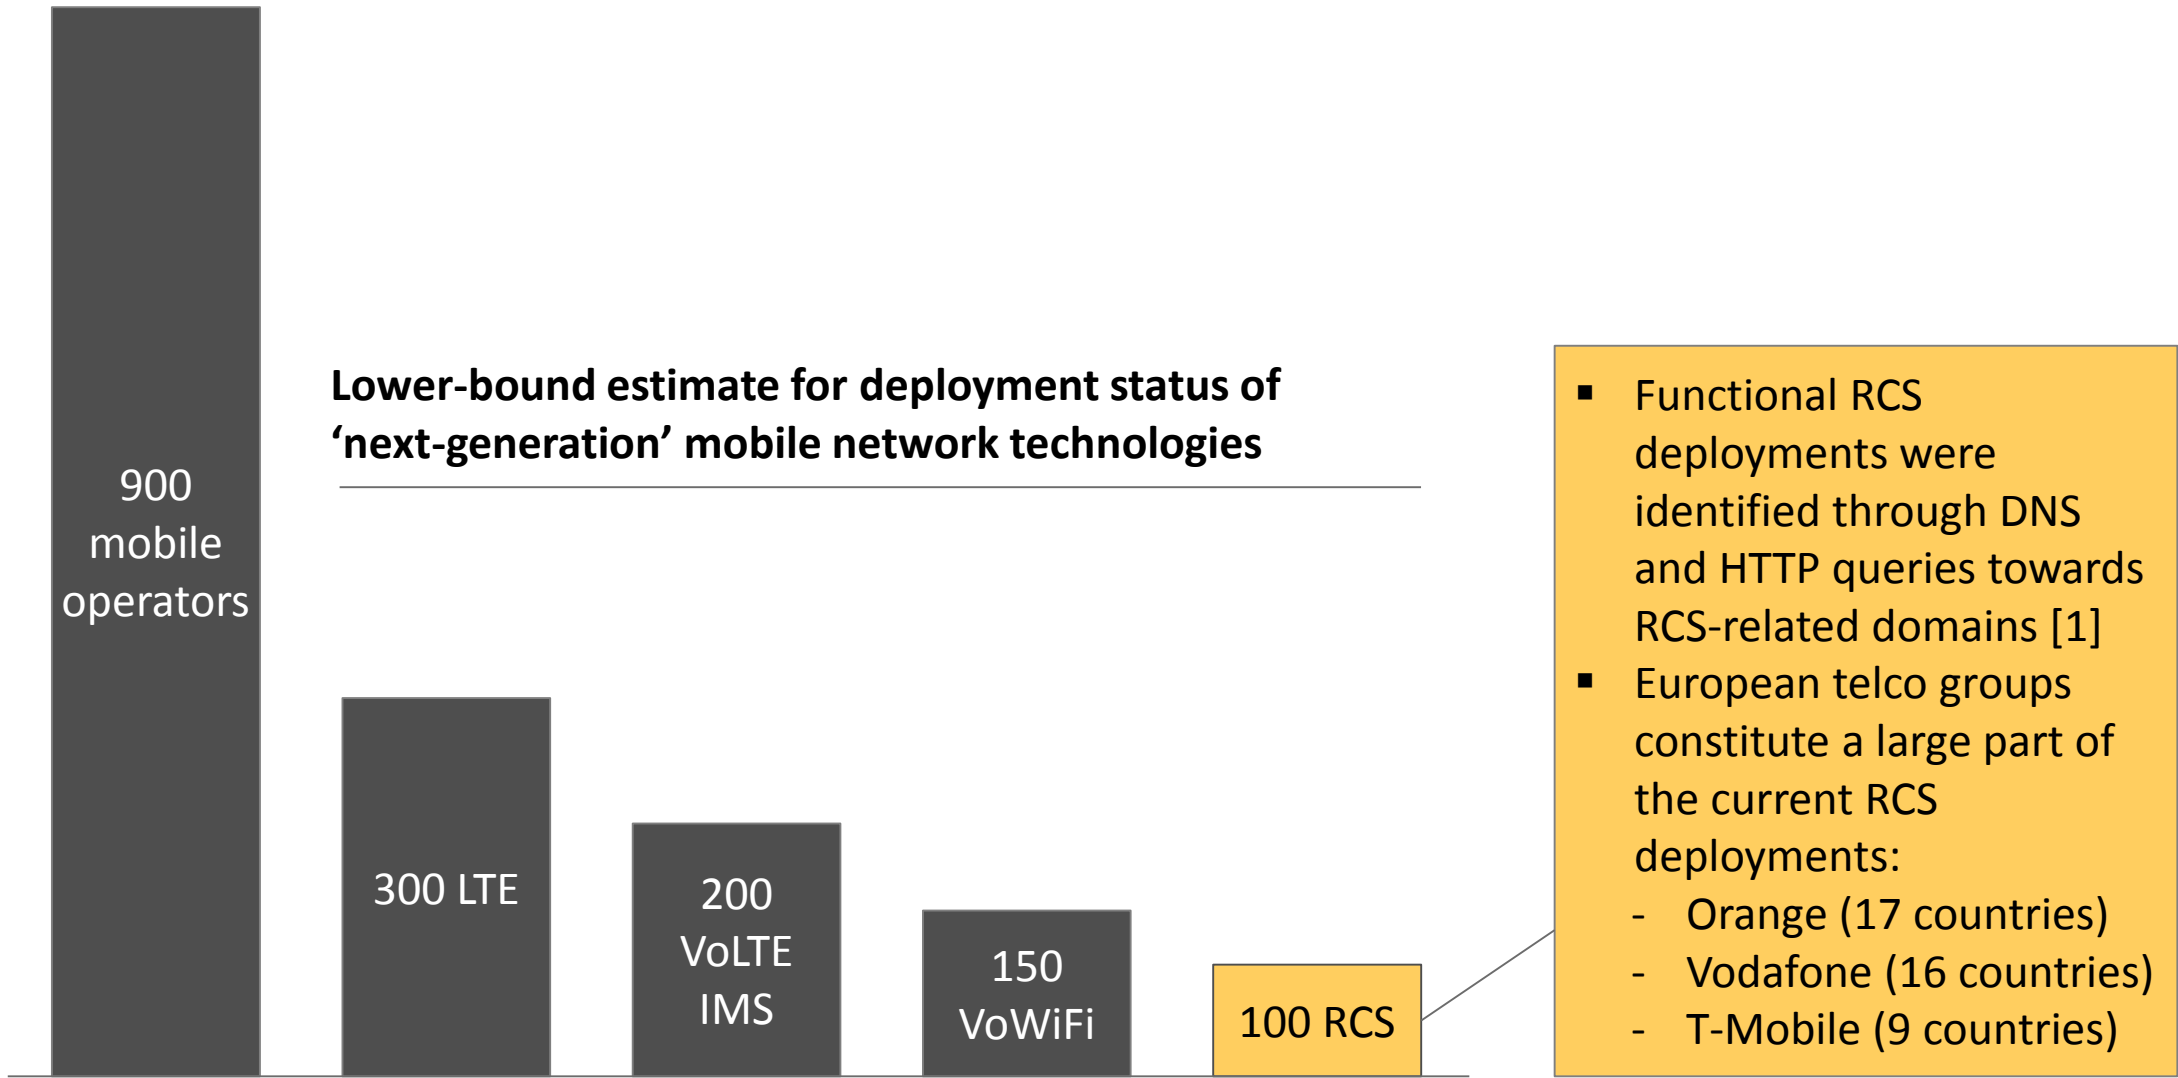

Active RCS deployments span 67 countries, while a few others are conducting trials

■ At least one network implements RCS ■ RCS in trial

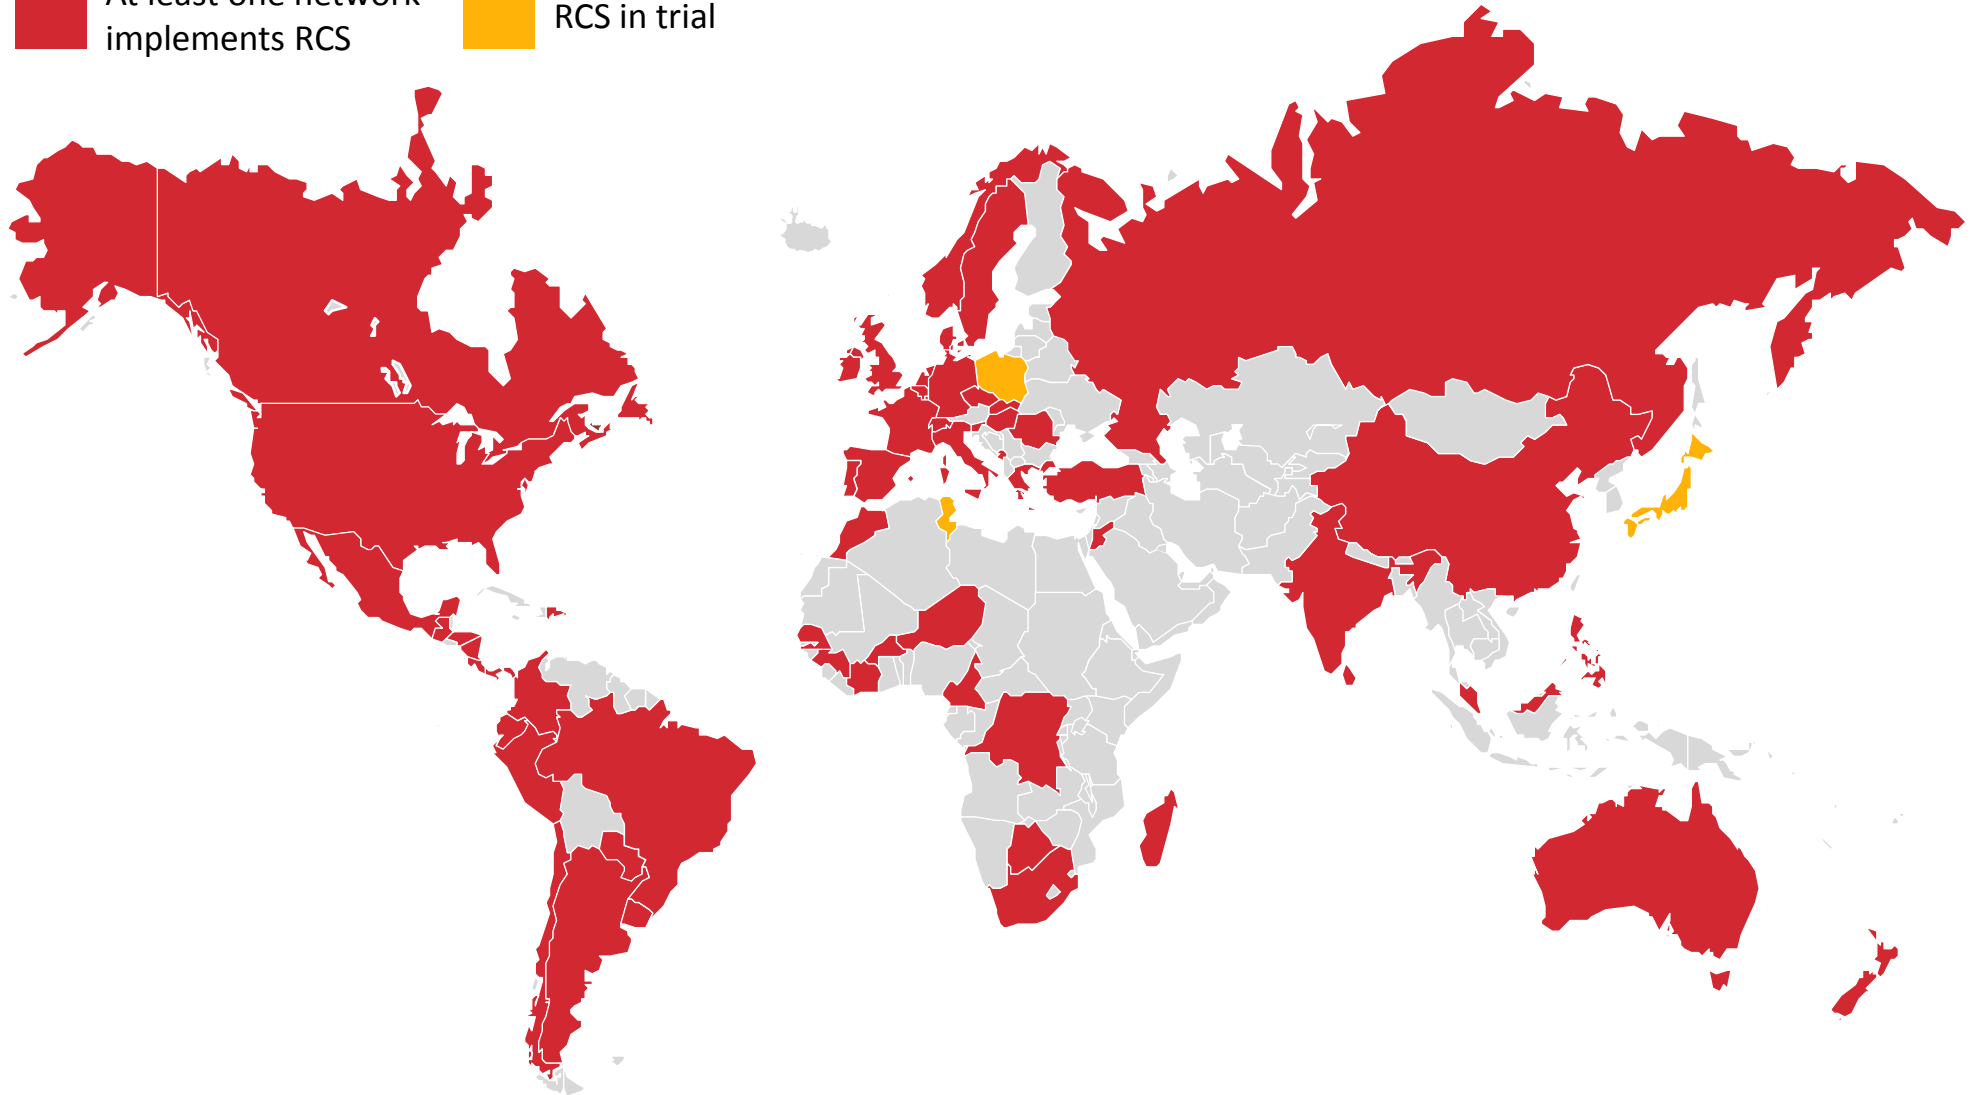

Agenda

1. Mobile network attack recap

 **2. Attacks on new technologies**

3. Mitigations

What attacks are possible in RCS?

Example hacking goal

Example method using RCS

Attack scope

Track users

A Get IP address of victim / verify if user is online

Impersonate users

B Caller-ID spoofing in calls / messages

Conduct fraud

C Inject traffic / hijack session if victim is behind the same NAT

Website DDoS

D Send file attachment forcing auto-preview on victim

Intercept texts

E Connect to RCS with user credentials or hijack user session


These hacks should work against many RCS deployments as they do not require secret information about the victim; they do rely on configuration issues in the network

Requires victim's config file or DNS MITM capabilities

A User presence and coarse location can be disclosed by replies to SIP OPTIONS requests


Once connected to RCS, a malicious user can collect information about other users by sending the SIP OPTIONS request to sequential mobile numbers

In addition to presence, the response message discloses the local IP of the victim, potentially revealing its location

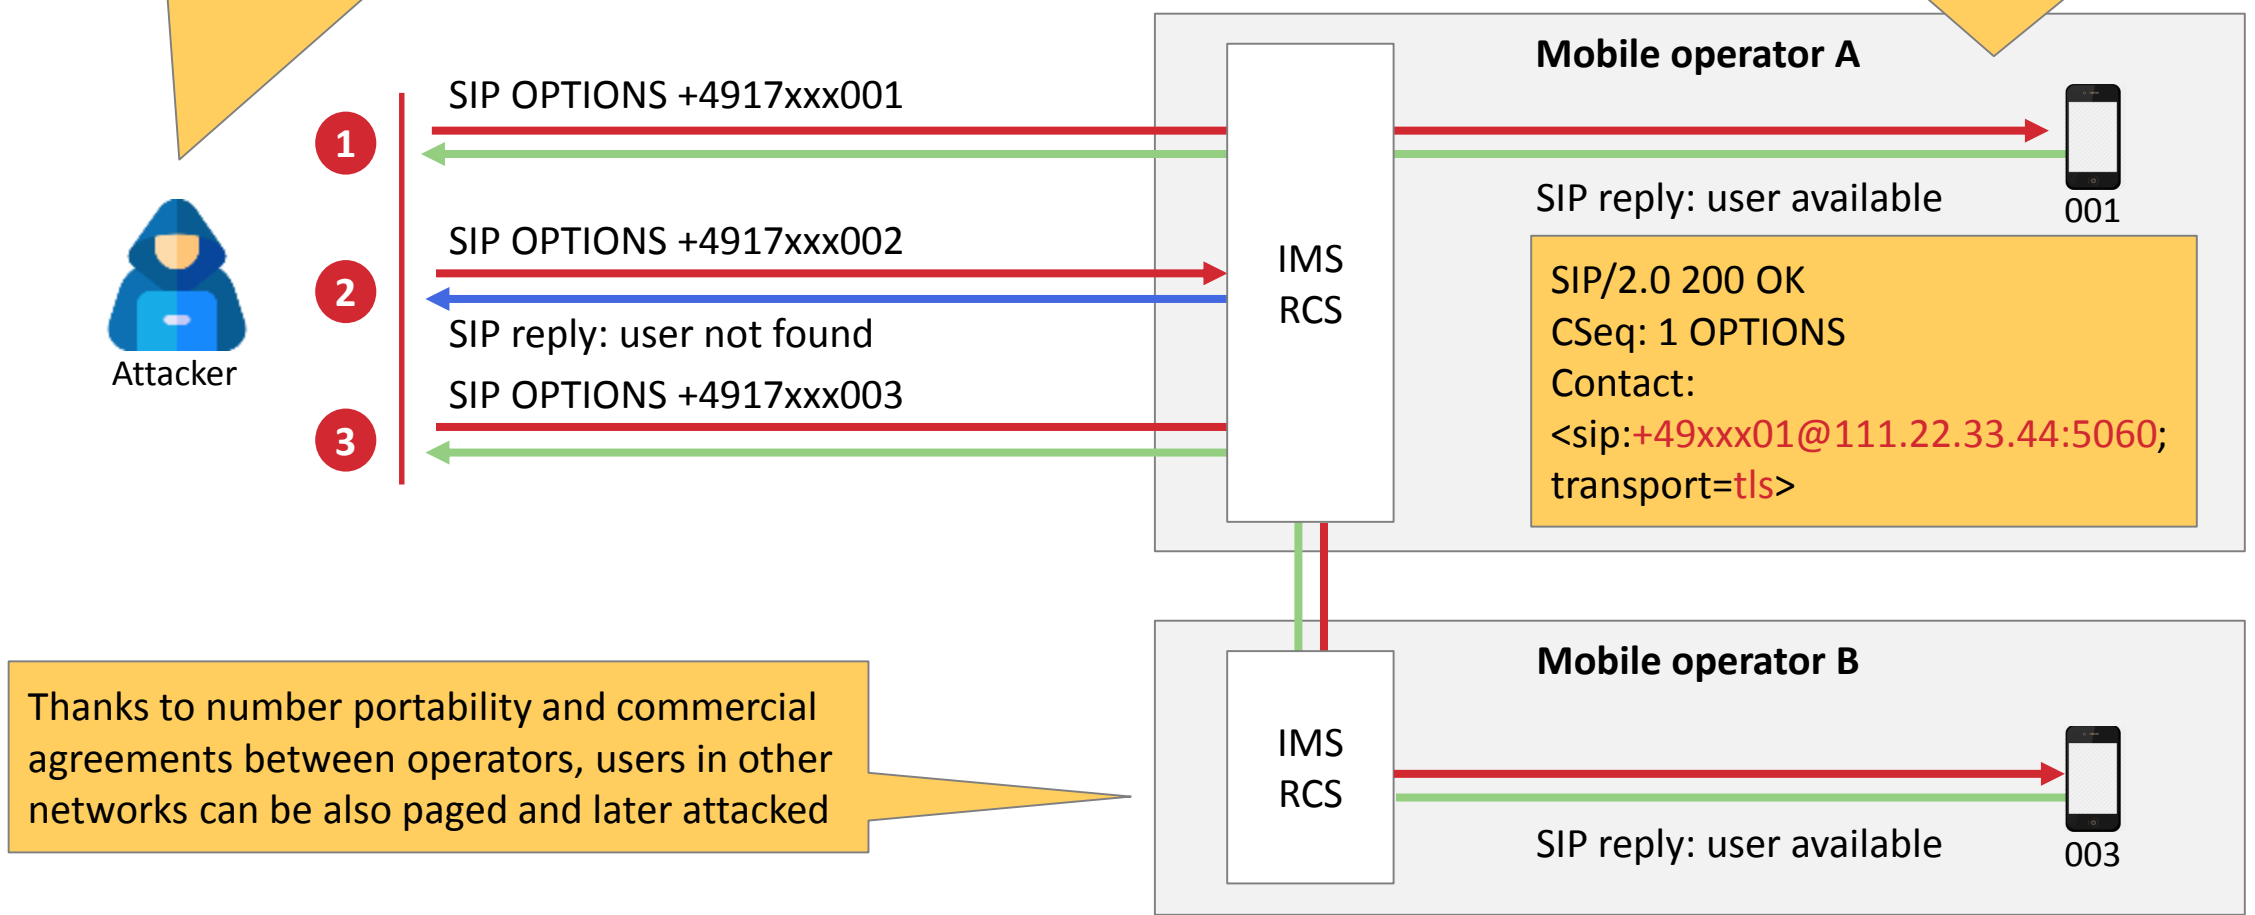

Thanks to number portability and commercial agreements between operators, users in other networks can be also paged and later attacked

B Missing verification of user supplied heat SBC allows caller-ID spoofing

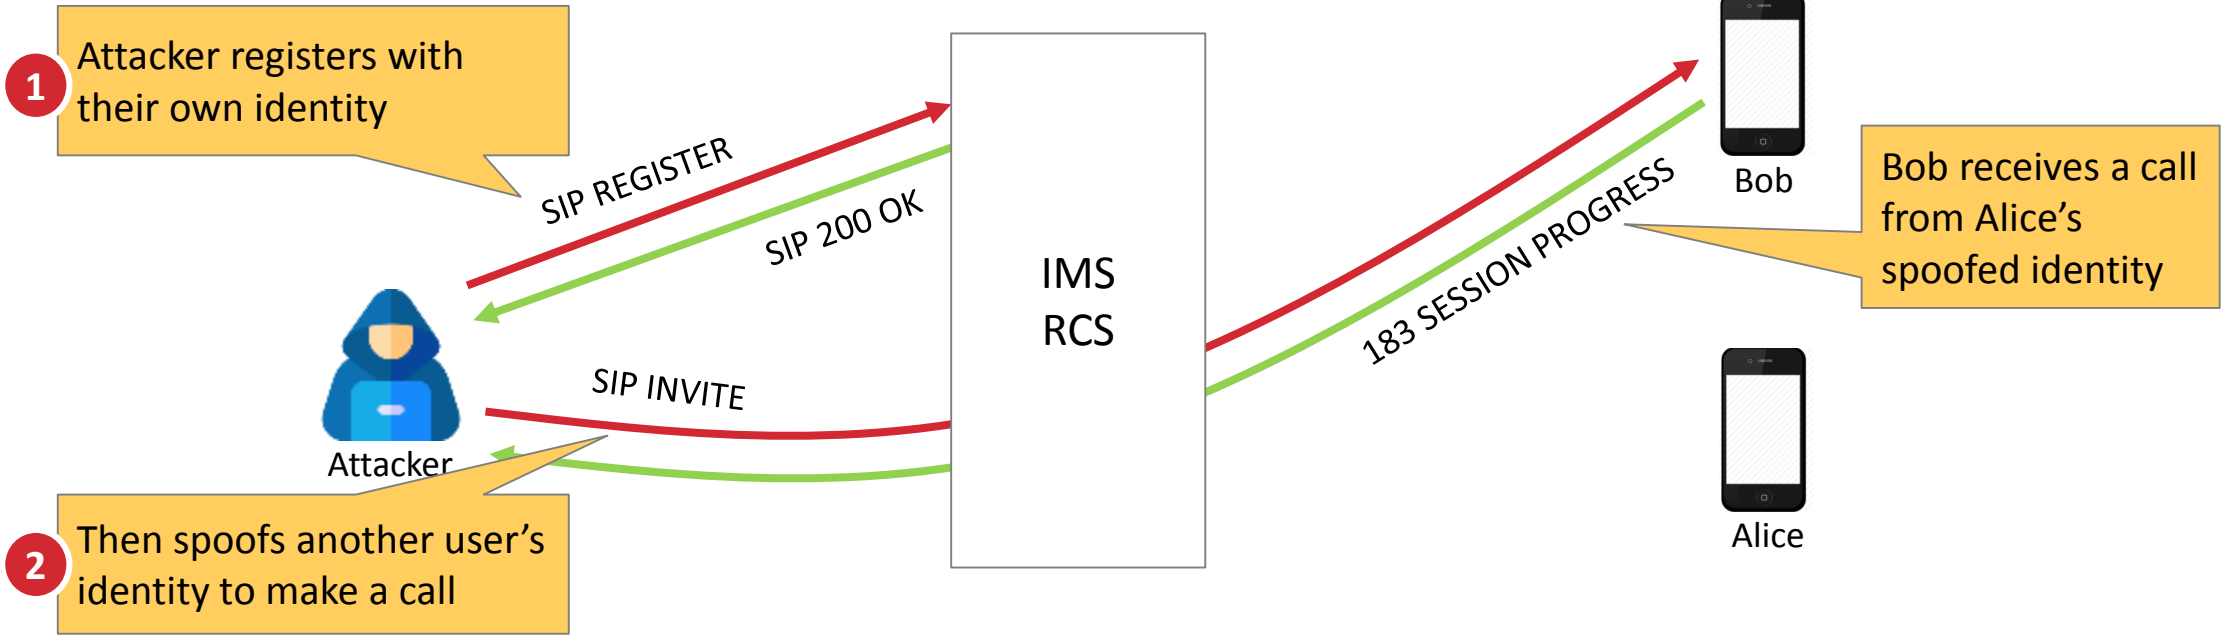


```
1 SIP REGISTER  
REGISTER sip:mno.net SIP/2.0  
From: <sip:+4917...@mno.net>;tag=291412310  
To: <sip:+4917...@mno.net>  
.....
```

```
2 SIP INVITE  
INVITE sip:bob@mno.net;phone-context=mno.net SIP/2.0  
To: <sip:bob@mno.net;phone-context=mno.net>  
From: <sip:1337@mno.net>;tag=291412310  
P-Preferred-Identity: <sip:1337@mno.net>  
.....
```



C Traffic injection is possible if victim and attacker share the same public IP address

-Demo-

Attack scenario 1
The attacker and victim are behind the same NAT

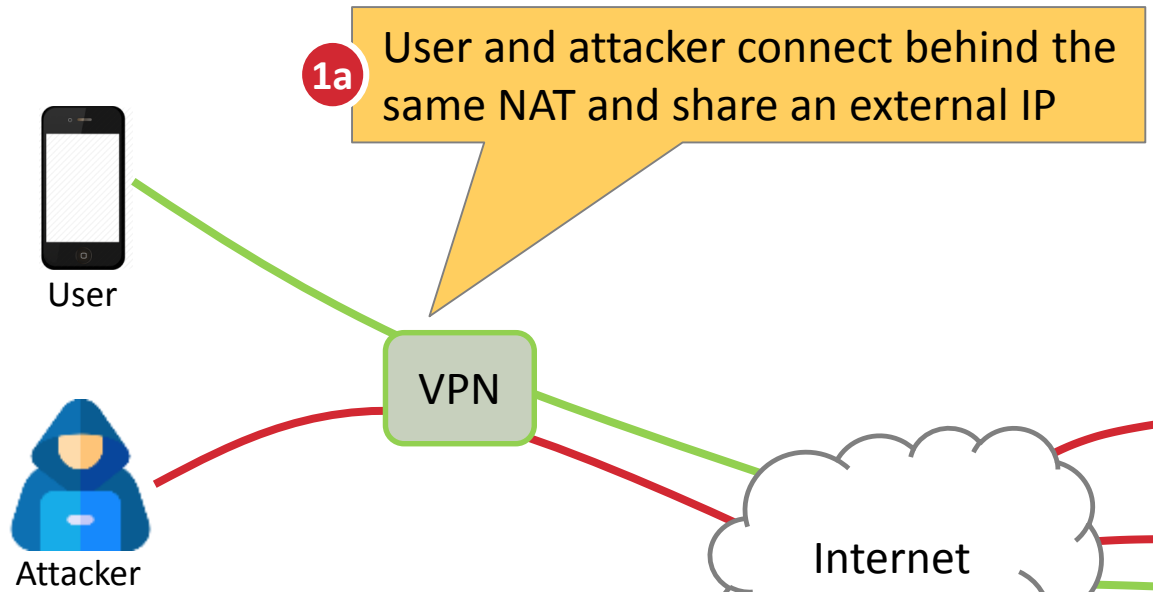

Attack scenario 2
The attacker manipulates user traffic using a rogue AP

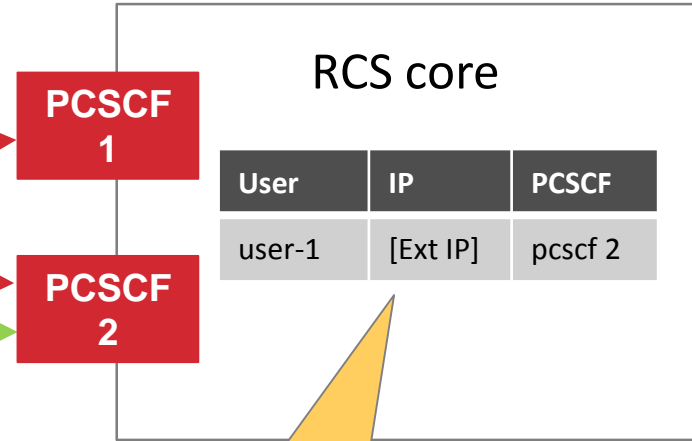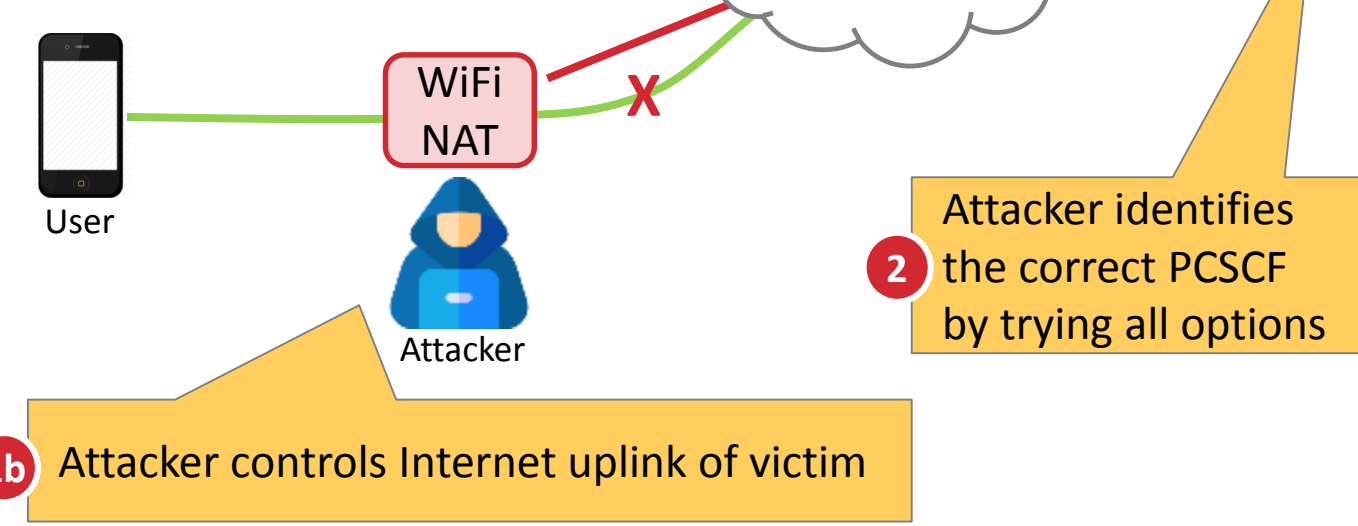


3 In some implementations, attackers can inject messages into the RCS core because users are solely identified by their mobile number and public IP

D Automatic media preview of malicious links enables DDoS and sensitive info leaks

RCS can send media content

The Message Session Relay Protocol is used to share files (images, videos, audio) between RCS users. This protocol is similar to SIP and HTTP, and carries content metadata in XML format.

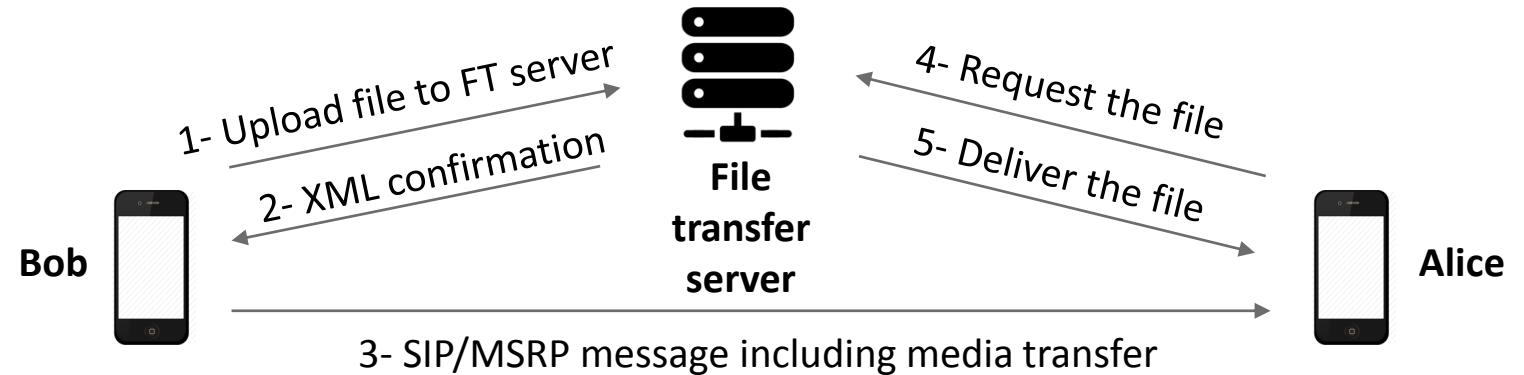

Scenario 1 - Leverage RCS clients to DDoS a website

1. Attacker identifies a large file on a target website
2. Attacker crafts an XML message where the thumbnail URL (indicated as a small file) points to target large file
3. Attacker sends the crafted XML message as a SIP/MSRP message to many thousands of subscribers
4. Each RCS client automatically attempts to download the file overloading the target website

Scenario 2 - User tracking

1. The attacker starts a web server on a public IP
2. The attacker sends an RCS message including preview-able contents hosted on that server
3. The victim attempts to download the content disclosing their IP address

Scenario 3 - Account takeover

1. The attacker conducts the attack as in scenario 2, and collects headers sent by the victim
2. If an RCS session token is included, the attacker can impersonate the victim sending messages and starting calls

E Intercept can be achieved abusing RCS signaling in multiple ways

Attack scenario 1

Set call forwardings abusing the XCAP interface

Implementation issues (vendor dependent)

We found some buggy XCAP implementation that does not properly validate the identity when interacting with the server, thus enabling XCAP settings manipulation

Configuration issues (network dependent)

If the XCAP server uses password authentication instead of the secure SIM-based authentication, the password could be brute-forced

Attack scenario 2

Steal the config file so you can provision on behalf of the victim

1 Malicious apps

2 Mobile hotspot sharing

3 Malicious open WiFi with captive portal

4 Brute force identity/OTP via web


Attack scenario 3

SIP MITM via DNS spoofing

5 Redirect SIP traffic to a rogue P-CSCF

Details in the next slides

E 1+2 Malicious app or rogue hotspot can get in the middle of RCS provisioning

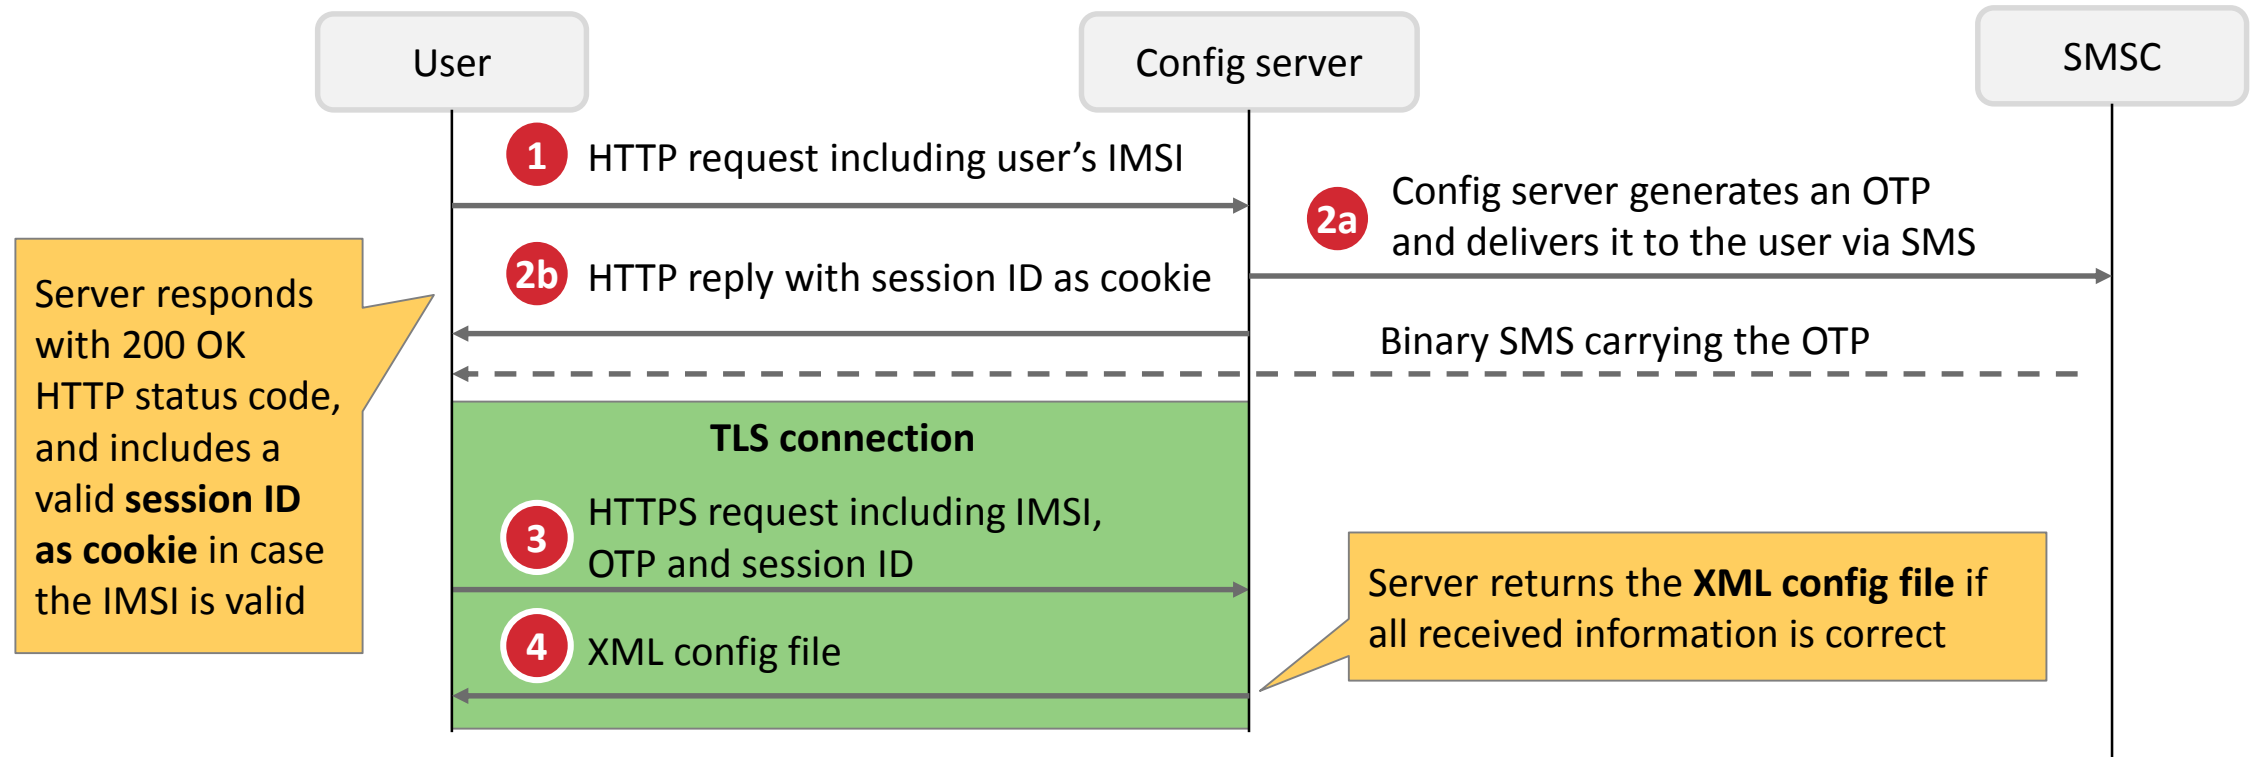


Server responds with 200 OK HTTP status code, and includes a valid **session ID as cookie** in case the IMSI is valid

Server returns the **XML config file** if all received information is correct

- Attack scenario 1 Malicious app**
- The app is installed on victim's device
 - The app uses victim's LTE connection to fetch config file
 - If the app has SMS_READ permission, it can retrieve even OTP code, for networks that require it

- Attack scenario 2 Mobile hotspot sharing**
- Attacker uses victim's LTE connection via hotspot sharing
 - Attacker can request config file through victim's connection, and retrieve it

E 3 Rogue WiFi can steal victim's config file injecting JavaScript code

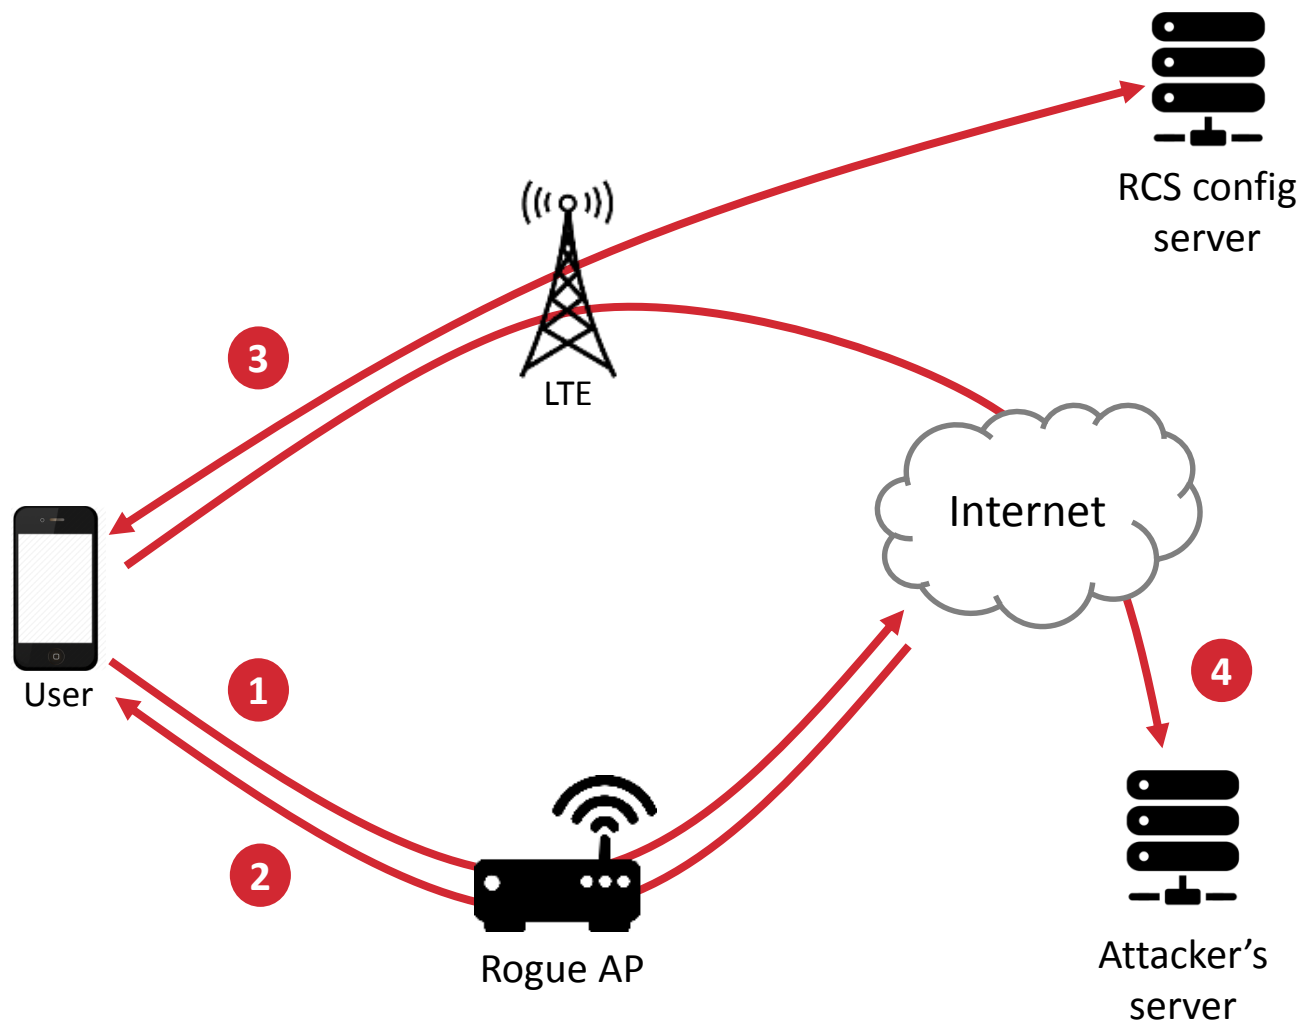

- ### Attack sequence
- 1 Victim tries to access a website through a rogue AP
 - 2 The rogue AP retrieves the content of the website requested by the victim and forwards it back injecting malicious JavaScript. Immediately after, the AP pushes back the victim to LTE, terminating the WiFi access
 - 3 The malicious JavaScript code retrieves the RCS config file via LTE connection
 - 4 The malicious JavaScript code uploads the retrieved XML config file to the attacker's server on the internet

-Demo-

E 4 Some networks requiring OTP verification are prone to user account brute force

1

Enumerate IMSIs.

Perform GET over HTTP supplying a random IMSI until a 200 is returned

Attacker

RCS auto config server

Request	Payload	Status
618	2006926662	200
416	2306619324	200
274	9905718604	200
1000	2339995484	403
999	5301958639	403
998	3019582052	403
997	6318945582	403
996	2346086272	403
995	9642808511	403
994	9233382889	403

Get cookie (invalid IMSI)

HTTP 40X

Get cookie (valid IMSI)

HTTP 200 + Cookie

Valid IMSIs found

2

Brute force OTP.

Quickly perform GET over HTTPS trying all possible OTP values (up to 6 digits)

Attacker

RCS auto config server

Request	Payload	Status
47	364188	200
46	321886	400
45	860405	400
44	605306	400
43	980066	400
42	807303	400
41	525721	400
40	201573	400
39	070424	400
38	601133	400

Get config (IMSI, cookie, OTP1)

HTTP 40X


Get config (IMSI, cookie, OTP2)

HTTP 200 + XML config

Correct OTP found




E 1-4 Intercept first step: Login using victim's RCS account, activate SMS-over-IP in HSS

1 Steal victim's RCS config file (using any of the 4 methods described in the previous slides)

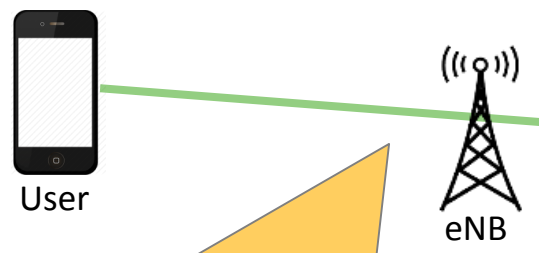


2 User attaches to the LTE network

3 Attacker registers to the RCS, announcing the SMS over IP capability in the SIP 'Contact' header

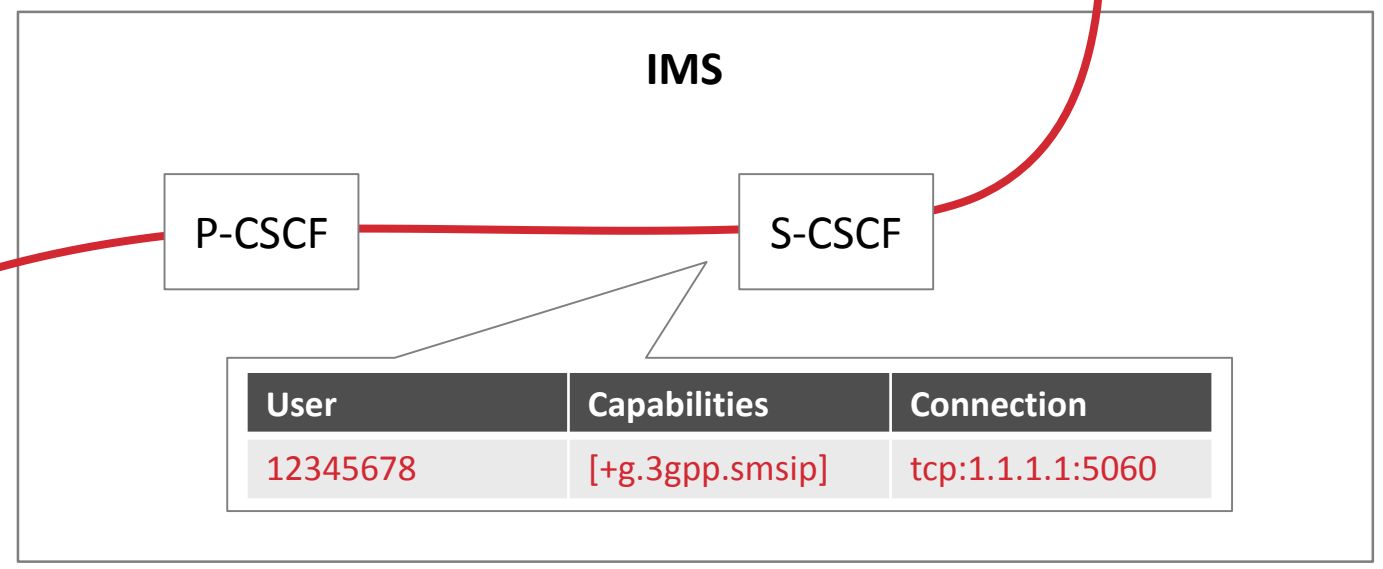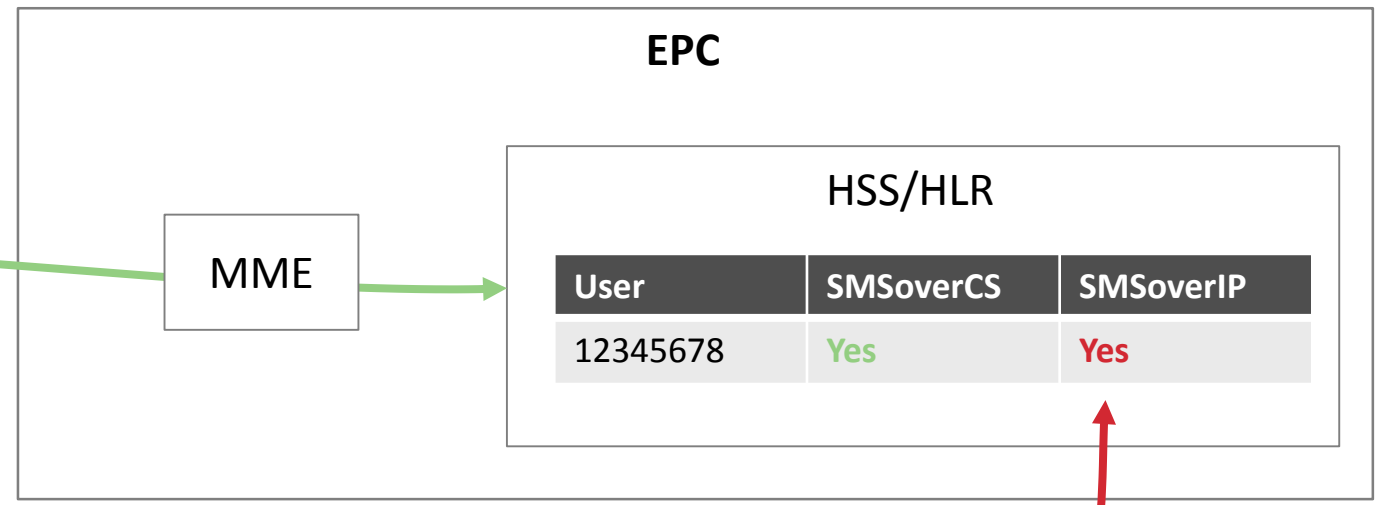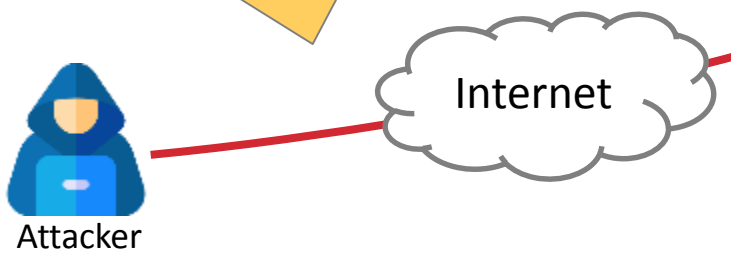

E 1-4 Intercept second step: Wait for SMS delivery

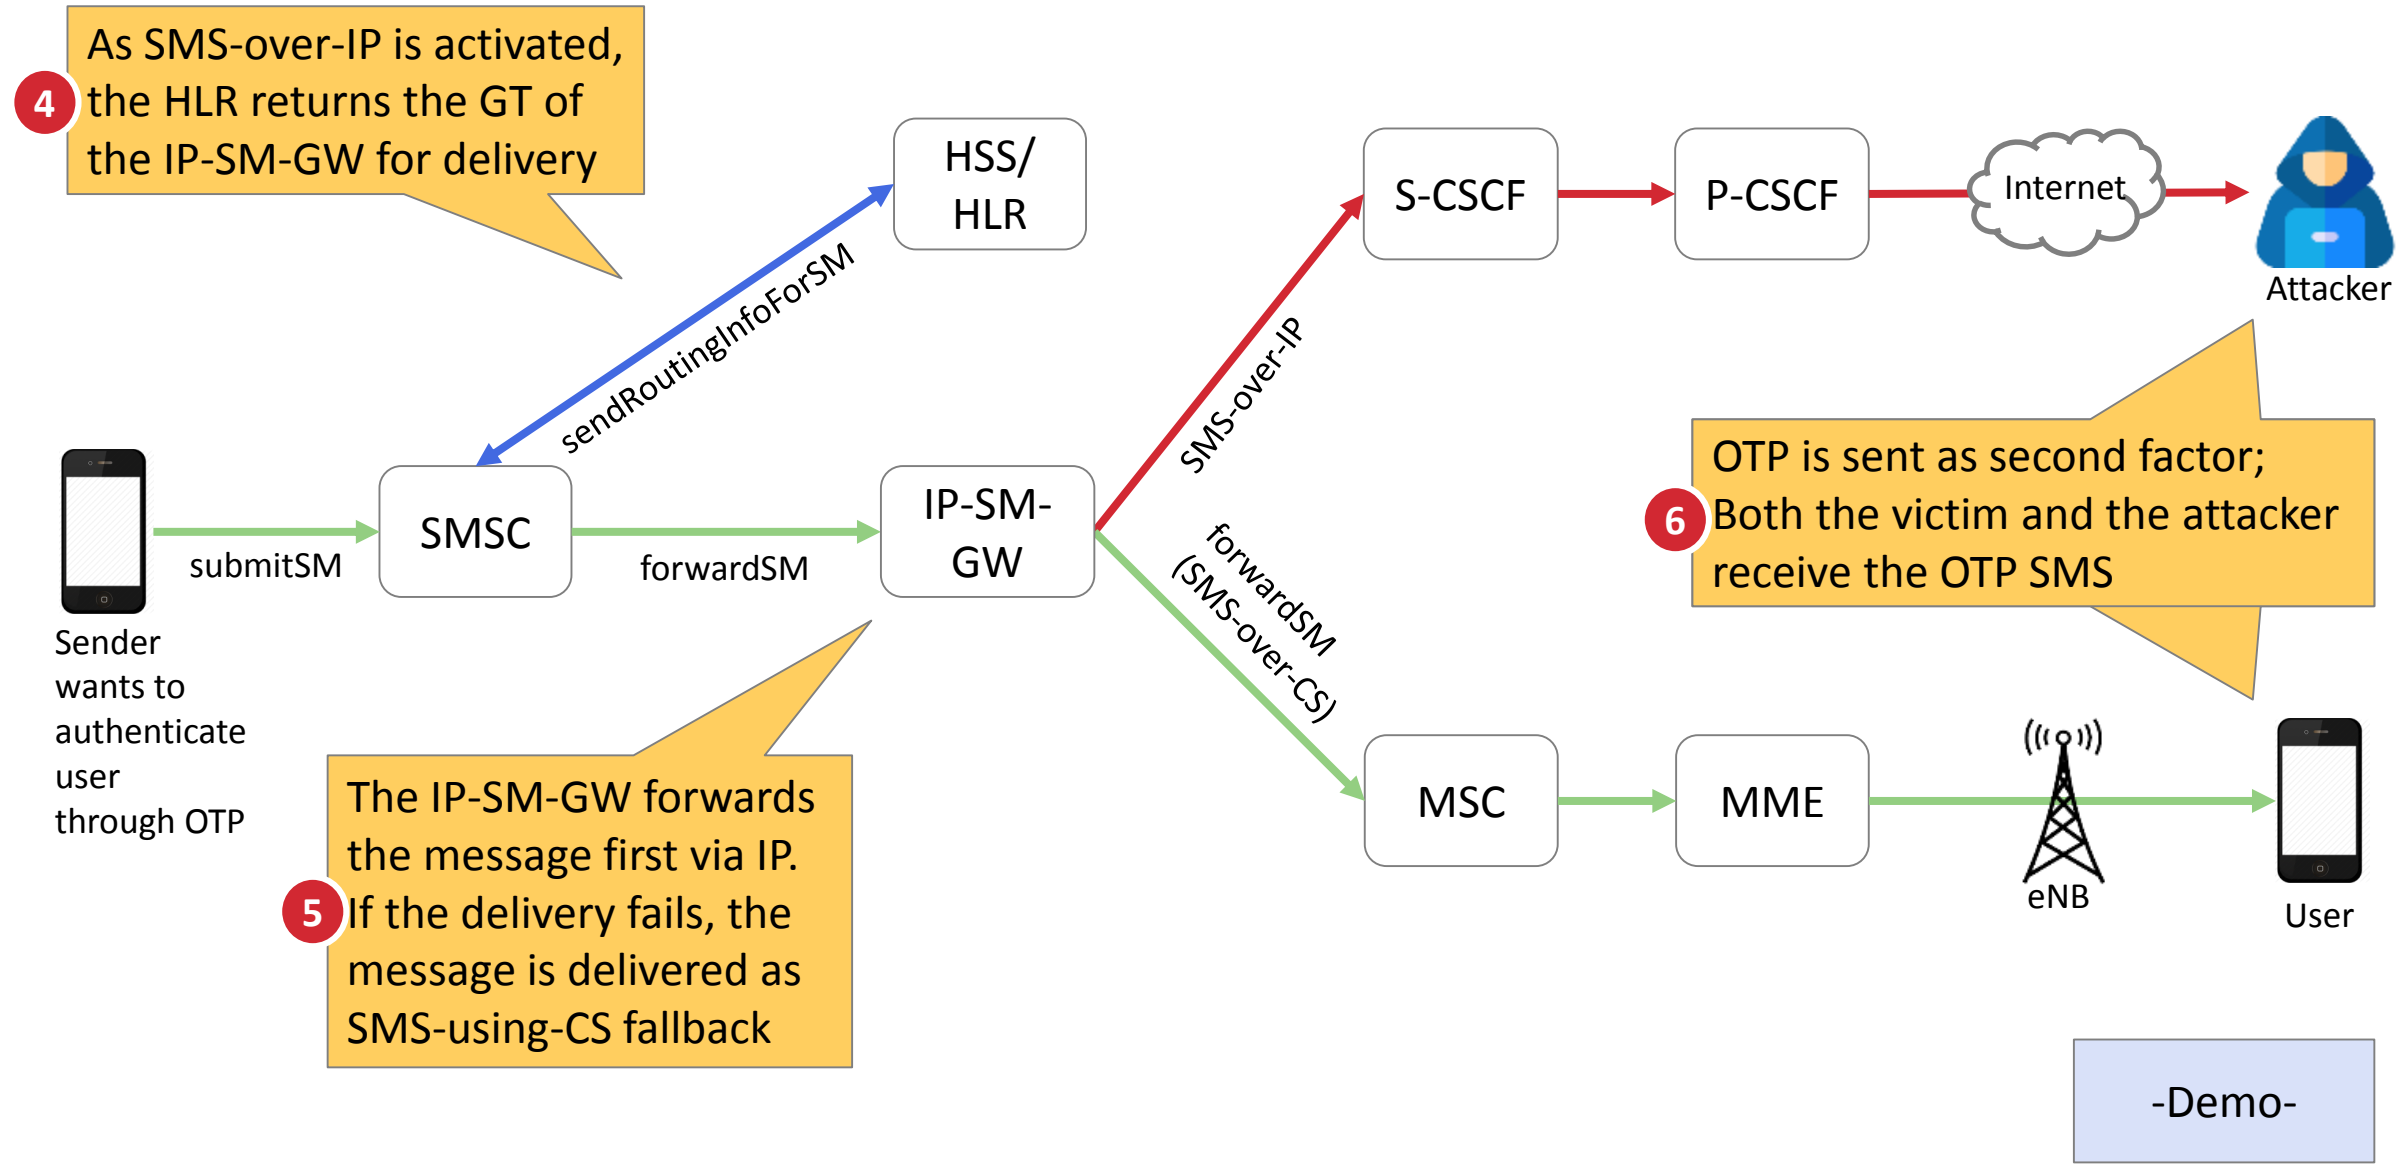


E 5 Local DNS spoofing enables MITM attacks against default Android RCS implementation

The lack of strict domain matching between initial RCS config parameters and actual TLS certificates allows hackers to fully hijack RCS sessions with any valid SSL certificate

Attacker uses a valid cert for pcscf.attacker.io

Attack sequence

- 1 Victim's RCS client tries to resolve the IP address of the P-CSCF
- 2 The rogue AP replies with a fake response that points to a fake P-CSCF controlled by the attacker
- 3 Victim's RCS client successfully establishes a TLS connection with the fake P-CSCF (valid certificate)
- 4 The fake P-CSCF transparently forwards all RCS traffic between the victim user and the legitimate P-CSCF

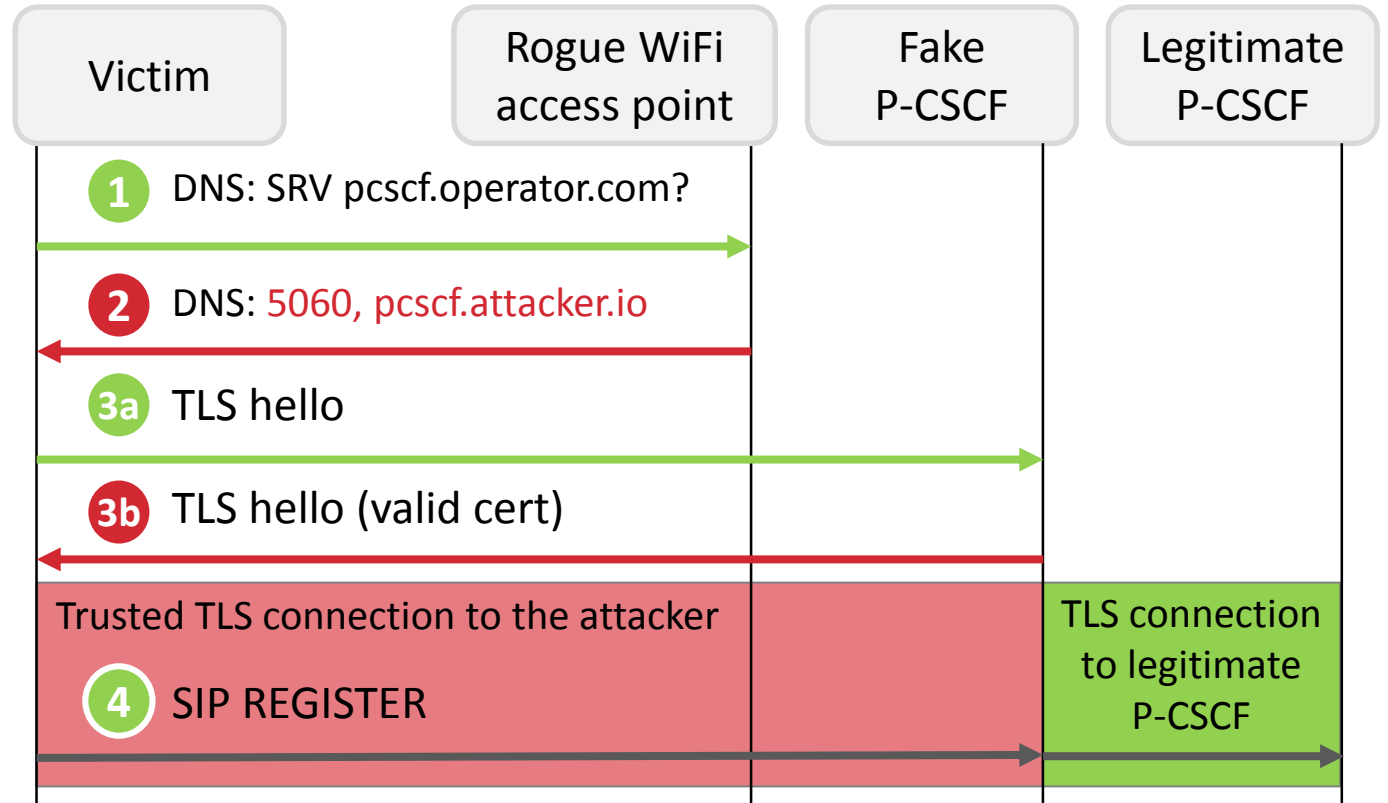

-Demo-

-
1. Mobile network attack recap
 2. Attacks on new technologies

 **3. Mitigations**

MNOs and RCS vendors can mitigate these issues by applying 7 best practices

- Not all RCS deployments are vulnerable to all attacks discussed in this presentation
- We found some networks vulnerable to each of the attacks
- To mitigate attacks, seven countermeasures can improve RCS deployments

Area	Best practice	Implementation details	Affected components
Client provisioning	o Authenticate using SIM / secure element	User authentication should be GBA/BSF based	RCS configuration server
	r Use strong OTP verification codes	OTP should be at least 8 alphanumeric characters	RCS configuration server
	Apply rate limiting	Limit OTP validity to 5 minutes and 3 HTTP request attempts	RCS configuration server, SBC/P-CSCF
RCS services	Validate client identity	Validate SIP session using state (e.g. source IP, cookie, ...)	SBC/P-CSCF
	Avoid information leakage	Strip sensitive information from SIP requests	SBC/P-CSCF, RCS client
	Filter uploaded contents	Check/restrict content-type and size provided by clients	SBC/P-CSCF, FT server
RCS client	Enforce chain of trust	Connect only to trusted domains, validate certificates	RCS client, DNS

Take aways

- 1** Telcos and mobile vendors are moving all communications to IP protocols
- 2** New technologies are often poorly implemented and vulnerable to old attacks
- 3** Weak user authentication can expose RCS clients to intercept and impersonation risks
- 4** Security best practices should be applied and verified to new telco technologies

Questions?

Luca Melette <luca@srlabs.de>, Sina Yazdanmehr <sina@srlabs.de>